Carbide-Tipped Hole Saws



drills include our EHB 16 series or other hand-held drills



1-Series Carbide-Tipped **Hole Cutters**

with slip clutch - see page 72

1" effective length Center twist pilot drill Safety Collar Stop

3/8" shank on cutters up to 3-1/4" dia. 1/2" shank on cutters 3-5/16" dia. and larger

Order No.

1-1-1114

1-1-1116 1-1-1118

1-1-1120

1-1-1122

1-1-1124

1-1-1126

1-1-1128 1-1-1136

1-1-1144

Urder No.	Diameter	Urder No.	Diameter		
1-1-118*	9/16"	1-1-166	2-1/16"		
1-1-120*	5/8"	1-1-168	2-1/8"		
1-1-122	11/16"	1-1-170	2-3/16"		
1-1-124	3/4"	1-1-172	2-1/4"		
1-1-126	13/16"	1-1-174	2-5/16"		
1-1-128	7/8"	1-1-176	2-3/8"		
1-1-130	15/16"	1-1-178	2-7/16"		
1-1-132	1"	1-1-180	2-1/2"		
1-1-134	1-1/16"	1-1-182	2-9/16"		
1-1-136	1-1/8"	1-1-184	2-5/8"		
1-1-138	1-3/16"	1-1-186	2-11/16"		
1-1-140	1-1/4"	1-1-188	2-3/4"		
1-1-142	1-5/16"	1-1-190	2-13/16"		
1-1-144	1-3/8"	1-1-192	2-7/8"		
1-1-146	1-7/16"	1-1-194	2-15/16"		
1-1-148	1-1/2"	1-1-196	3"		
1-1-150	1-9/16"	1-1-198	3-1/16"		
1-1-152	1-5/8"	1-1-1100	3-1/8"		
1-1-154	1-11/16"	1-1-1102	3-3/16"		
1-1-156	1-3/4"	1-1-1104	3-1/4"		
1-1-158	1-13/16"	1-1-1106	3-5/16"		
1-1-160	1-7/8"	1-1-1108	3-3/8"		
1-1-162	1-15/16"	1-1-1110	3-7/16"		
1-1-164	2"	1-1-1112	3-1/2"		

2-Series Carbide-Tipped **Hole Cutters** Extra Heavy Duty

5/8" effective length Spring-loaded Pilot Pin

Cutters feature milled, 3-flat shank designed to fit 1/2" chucks.

Order No.	Diameter			
2-1-118	9/16"			
2-1-120	5/8"			
2-1-122	11/16"			
2-1-124	3/4"			
2-1-126	13/16"			
2-1-128	7/8"			
2-1-130	15/16"			
2-1-132	1"			
2-1-134	1-1/16"			
2-1-136	1-1/8"			
2-1-138	1-3/16"			
2-1-140	1-1/4"			
2-1-142	1-5/16"			
2-1-144	1-3/8"			



with safety clutch



1-Series Accessories

Diameter 3-9/16"

3-5/8"

3-3/4"

3-7/8"

4-1/4"

3-11/16"

3-13/16"


3-15/16"

Order No.	Description		
1-1-drill	Center Pilot Drill		
1-1-spring	Spring		
1-1-screw	Screw		



2-Series Accessories

Order No.	Description
2-1-pilot	Pilot/Ejector Pin
2-1-screw	Screw





Electric Drills and Drive Units

High-torque, multi-geared and variable-speed motors






- High-torque output
- Variable-speed, two- and four-geared drills for optimum speed selection
- Reversible motors and electronic torque control on selected models
- Ideal for special applications including valve turning, tube rolling and other jobs
- Safety slip clutch on 1¹/₄" capacities to protect operator and tool
- Drilling capacities up to 1¹/₄" in steel
- Special OEM motors available on request
- One-year warranty





Model EHB 16/1.4 S

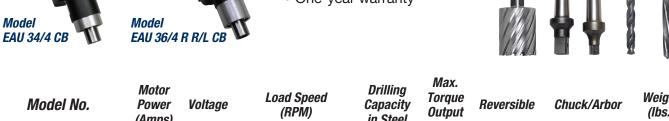

Model No.	Motor Power (Amps)	Voltage	Load Speed (RPM)	Drilling Capacity in Steel	Max. Torque Output (ft./lbs.)	Reversible	Chuck/Arbor	Weight (lbs.)
EHB 16/1.4 S	7.3	110V	0-500	5/8"	12	NO	5/8" Keyless	6.8
EHB 16/1.4 S R/L	9.6	110V	0-450	5/8"	19	YES	⁵ /8" Keyless	7
EHB 16/2.4 S R/L C	10	110V	0-430/0-760	5/8"	19	YES	5/8" Geared	7
EAW 16/2 R/L	9	110V	510/950	N/A	8	YES	⁵ /8" X 16 UN	7
EHB 20/2.4	10.5	110V	250/450	3/4"	32	NO	MT2	9.2
EHB 32/4.2	15.5	110V	110/175/245/385	1 ¹ / ₄ "	112	NO	MT3	15.2
EAU 34/4 CB**	20	110V	80/130/360/570	_	203	YES	MT3	19.5
EAU 36/4 R R/L CB** with 4-speed gearbox and variable speed	22	110V	50-120 80-190 110-270 180-420	_	187	YES	MT3	20

^{*} All units available in 220 Volt / 50Hz

Special Motors available upon request.



^{**} EAU 34/4 CB and EAU 36/4 R R/L CB include control box